



Double Reduction

Helical / Worm Dimensions


Style DXJ

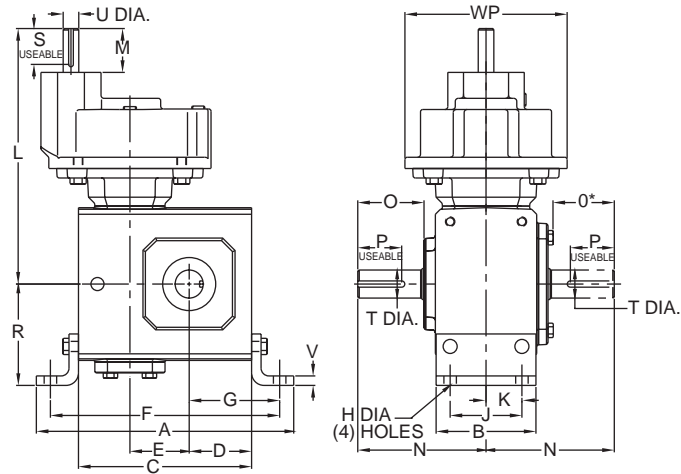

Styles DXJMQ & DXJM

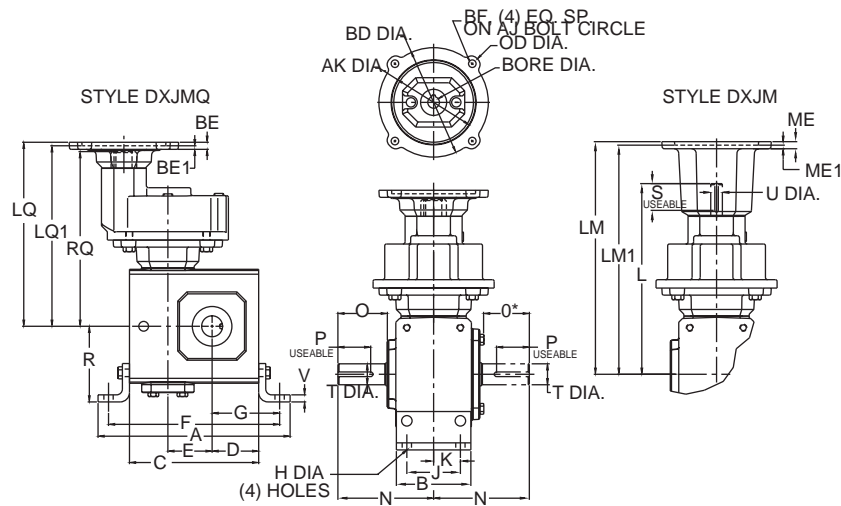

Assemblies

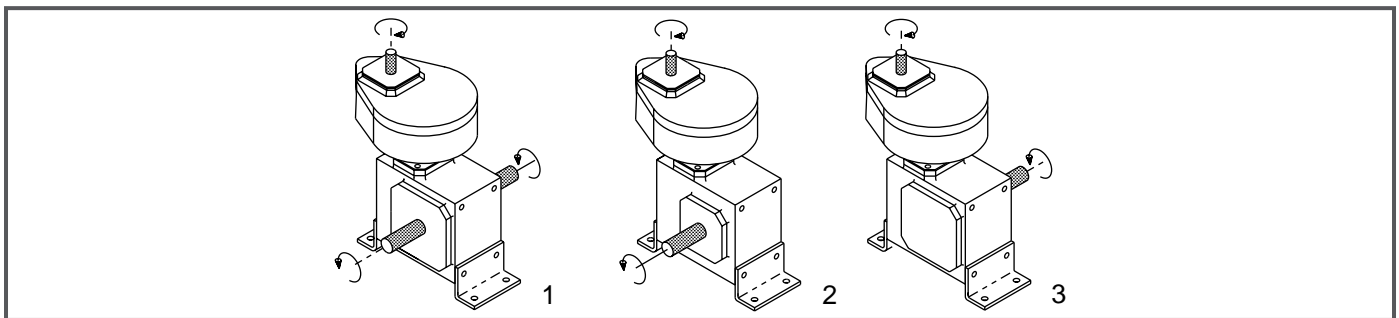

Note: The input shaft may be rotated in either direction. Units are for mounting as shown. Contact factory for other mountings. Assembly positions also apply to motor flange units ("MQ" and "M").

GROVE GEAR

Davis Industries, Inc. Phone & Fax: 800-577-0559 E-mail: sales@davis-ohio.com

Double Reduction

Styles DXJ, DXJMQ & DXJM

UNIT	A	B	C	D	E	F	G	H Dia.	J	K	L	M	N	O	O*	P**	R	S**
213	7.42	2.75	4.66	1.72	1.333	6.42	2.60	.38	2.00	1.00	N/A	N/A	4.00	2.16	1.94	3/16 x 1.50	2.94	N/A
215	8.14	3.50	5.38	1.91	1.540	7.08	2.76	.44	2.75	1.38	N/A	N/A	4.31	2.11	1.90	3/16 x 1.50	3.50	N/A
218	8.51	3.50	5.75	2.06	1.750	7.45	2.91	.44	2.75	1.38	N/A	N/A	4.31	2.05	1.84	3/16 x 1.38	3.50	N/A
220	9.76	4.00	6.38	2.28	2.063	8.62	3.40	.50	2.75	1.38	N/A	N/A	4.68	2.29	2.08	1/4 x 1.44	4.01	N/A
224	10.31	4.00	6.94	2.50	2.375	9.19	3.63	.50	2.88	1.44	10.24	1.76	5.14	2.66	2.44	1/4 x 1.75	4.06	3/16 x 1.44
226	11.62	5.00	8.00	2.94	2.625	10.38	4.13	.56	3.38	1.69	10.80	1.76	5.63	2.73	2.52	1/4 x 2.00	5.00	3/16 x 1.44
230	12.64	6.00	8.88	3.25	3.000	11.38	4.50	.56	3.88	1.94	11.30	1.76	6.75	3.60	3.36	1/4 x 2.25	5.62	3/16 x 1.44
232	13.14	6.00	9.38	3.50	3.250	11.88	4.75	.56	3.88	1.94	11.49	1.76	7.06	3.66	3.42	3/8 x 2.62	5.63	3/16 x 1.44
242	16.38	7.00	11.38	4.44	4.250	14.88	6.19	.69	5.00	2.50	17.48	3.61	8.12	4.50	4.21	1/2 x 3.06	6.50	1/4 x 2.17
252	19.00	7.00	14.00	5.12	5.250	17.50	6.87	.69	5.81	2.91	18.88	3.61	9.06	4.78	4.53	1/2 x 3.50	7.75	1/4 x 2.17

UNIT	T Dia.	U Dia.	V	WP
213	.625	N/A	.25	5.00
215	.750	N/A	.25	5.00
218	.875	N/A	.25	5.00
220	1.000	N/A	.38	5.00
224	1.125	.625	.38	6.50
226	1.250	.625	.38	6.50
230	1.250	.625	.38	6.50
232	1.500	.625	.38	6.50
242	1.875	1.250	.50	8.50
252	2.000	1.250	.50	8.50

*applies to double output shaft

**keyway width by length

NEMA Motor Data

NEMA Motor Flange Face Locations

UNIT	48CZ			56C/140TC			180TC			210TC			250TC		
	LM	RQ	LQ	LM	RQ	LQ	LM1	RQ	LQ1	LM1	RQ	LQ1	LM1	RQ	LQ1
213	N/A	7.79	8.29	N/A	7.79	8.29	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
215	N/A	8.32	8.82	N/A	8.32	8.82	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
218	N/A	8.42	8.92	N/A	8.42	8.92	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
220	N/A	8.79	9.29	N/A	8.79	9.29	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
224	N/A	N/A	N/A	12.49	9.38	9.88	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
226	N/A	N/A	N/A	13.05	9.94	10.44	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
230	N/A	N/A	N/A	13.55	10.44	10.94	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
232	N/A	N/A	N/A	13.74	10.63	11.13	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
242	N/A	N/A	N/A	N/A	N/A	N/A	20.66	14.46	14.97	20.66	14.46	14.97	21.22	14.86	15.53
252	N/A	N/A	N/A	N/A	N/A	N/A	22.06	15.86	16.37	22.06	15.86	16.37	22.62	16.26	16.93
2600	N/A	N/A	N/A	N/A	N/A	N/A	22.78	16.58	17.09	22.78	16.58	17.09	23.34	16.98	17.65

NEMA Motor Mounting Dimensions

Frame	AJ	AK	BD	OD	BE	BE1	ME	ME1	BORE	KWY.**	BF
48CZ	3.75	3.00	3.88	4.36	.38	N/A	.38	N/A	.500	1/8 x 1/16	.28
56C	5.88	4.50	5.88	6.64	.38	N/A	.38	N/A	.625	3/16 x 3/32	.41
140TC	5.88	4.50	5.88	6.64	.38	N/A	.38	N/A	.875	3/16 x 3/32	.41
180TC	7.25	8.50	9.00	9.00	N/A	.50	N/A	.50	1.125	1/4 x 1/8	.53
210TC	7.25	8.50	9.00	9.00	N/A	.50	N/A	.50	1.375	5/16 x 5/32	.53
250TC	7.25	8.50	9.00	9.00	N/A	.50	N/A	.50	1.625	3/8 x 3/16	.53

**keyway width by depth

Note: All dimensions listed are for reference only. Contact factory for certified dimensions.

⚠WARNING For safety, purchaser or user should provide protective guards over shaft extensions and any couplings, sheaves and belts, sprockets and chains, etc., mounted thereon.